

Uniclass L7473	OmniClass 23-35 47 11 11 19
CI/SfB	
(63)	X

2

LED Lighting Systems

Accessories | step, aisle & wall lighting



GRADUS



Contents

Corporate	4
Client Details	5
Where Gradus lighting can be used	6
Illustration of a step system	9
Illuminated Stair Edgings	
Continuity™ 12v DC LED Lighting System	12
Interlok Advance™ 12v DC LED Lighting System	13
Step Lighting Effects	14 - 15
Stair Edging Profiles	17
- PVC-u	18 - 19
- Aluminium	20 - 23
Insert colour availability for stair edging profiles	24
How to select the correct insert	25
Floor Trim Lighting Systems	27
Lighting Systems	
Continuity™ LED Linear Lighting System	32
Wall Lighting 24v DC LED System	34
Seat Lighting / Seat Row Indicator	36
LED Step Row Indicator	38
Decortape	40
Power Supply Units	41 - 42
Technical Services / Specification Guidelines	
Technical Services	44
Specification Guidelines	45 - 46
Index	48



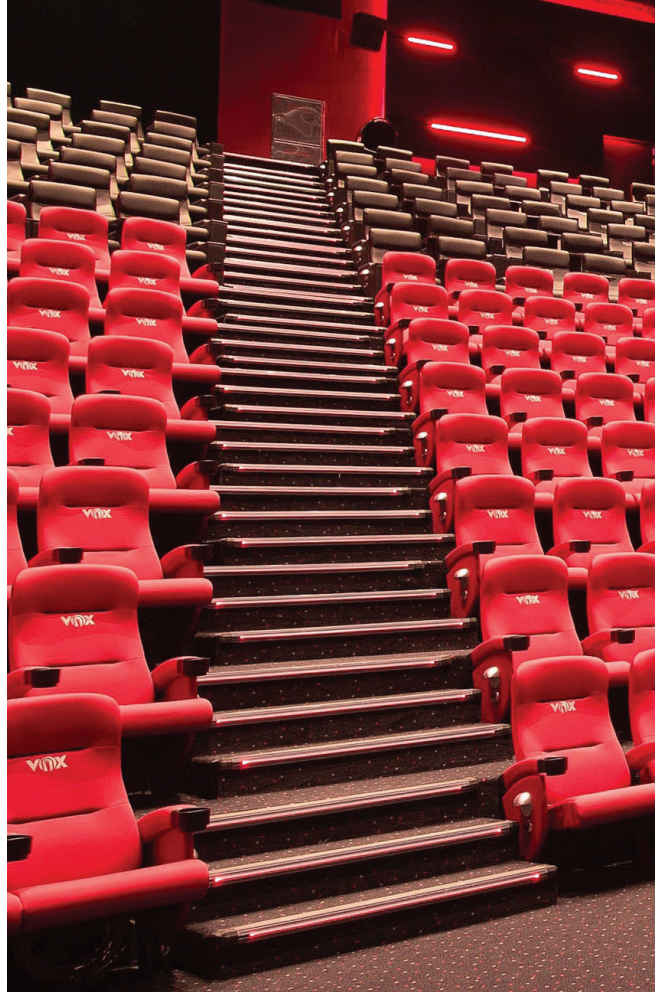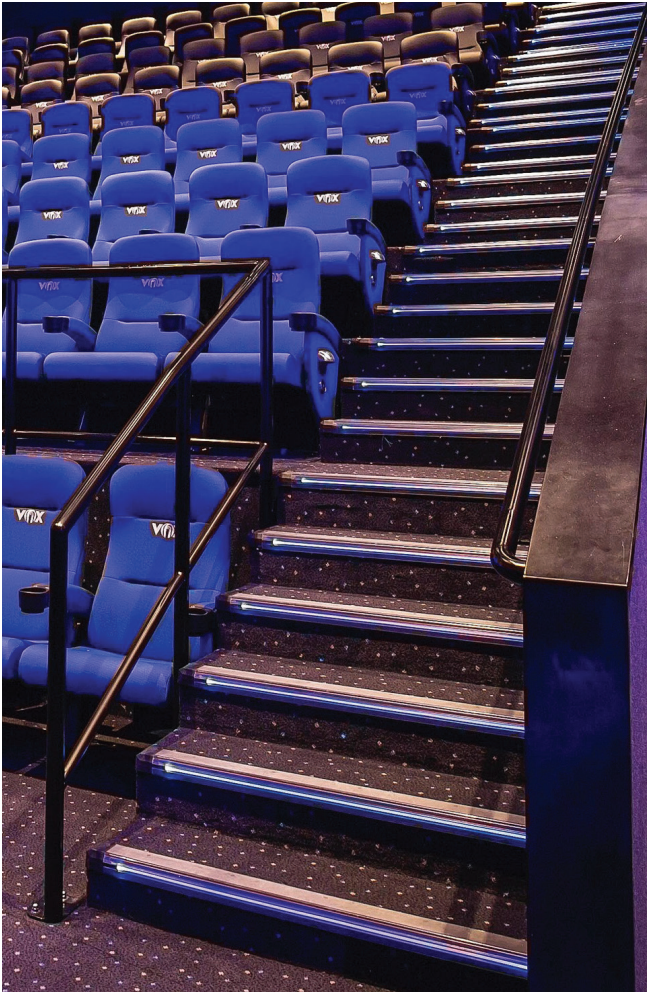

Corporate



LED Lighting Systems

Gradus offers a range of LED low voltage, decorative and safety lighting products including:

- step lighting
- aisle lighting
- row identification
- wall lighting
- seat lighting
- bespoke options



Sistemas De Iluminacion LED

Gradus ofrece una gama de productos para iluminación decorativa y de seguridad con sistema LED de bajo voltaje que incluye:

- iluminación de bordes de escaleras
- iluminación de pasillo y suelos
- identificación de fila
- iluminación de la pared
- iluminación de asiento
- opciones hechas a medida



Système de Balisage Lumineux

Gradus propose une large gamme de produits de balisage décorative et sécuritaire, à base de leds à basse tension

- nez de marche
- balisage au sol
- identification de rang
- balisage mural
- éclairage de fauteuils



LED 照明系统

葛雷德斯提供的产品含有一系列的低电压LED, 装饰和安全的照明产品, 包括:

- 楼梯照明灯
- 走廊照明灯
- 行列照明灯
- 墙面照明灯
- 座位照明灯
- 定制选项



LED Beleuchtungssysteme

Gradus bietet eine Reihe von LED Niedervolt-, Dekorations- und Sicherheitsbeleuchtungsprodukten an. Darunter auch folgende Produkte:

- treppenbeleuchtungen
- gangbeleuchtungen
- sitzreihen-kennzeichnung
- wandbeleuchtungen
- sitzbeleuchtungen
- massgeschneiderte optionen bzw. lösungen



Client Details



Cinema Groups

Cineworld
Vue Entertainment
Odeon
Showcase
City Screen
Reel Cinemas
Empire
Omniplex Cinema Group
WTW Cinemas
The Light Cinemas
Village Cinemas
Pathé
The Space Cinema
Zon Lusomundo
Cinestar
New Lineo Cinemas
JT Bioscopen
Auditorium Reel Cinemas
Grand Cinemas
Cathay Cineplexes
Kinopolis
Cinemark
Studio Movie Grill
Flix Brewhouse
Allen Theatres
Nordic Cinema Group

Education

The University of Manchester
University of Reading
Newcastle University
Durham University
University College London
University of Salford
Queen Mary, University of London
University of Bath
Anglia Ruskin University
Bangor University
American University of Sharjah
Hong Kong Baptist University
The Hong Kong Institute of Education
French International School of London
Cardiff University
University of Birmingham
University of Cambridge
University of Oxford
University of Southampton
Sheffield Hallam University
University of Sheffield


Leisure

Stringfellows
Madame JoJo's
Gracie's Sports Grille & Pizza
The Regency Club
Hippodrome, Colchester
Strawberry Moons
Broadway Boulevard
Carnival Cruise Lines
P&O Cruises
Royal Caribbean International
Princess Cruises
Grimaldi Lines
Dubai Marina
Marina Bay Sands Casino
Fusionopolis, Singapore
Headingley Experience

A typical auditorium layout showing where Gradus lighting can be used

Decortape - page 40


LED Step Row Indicator - page 39

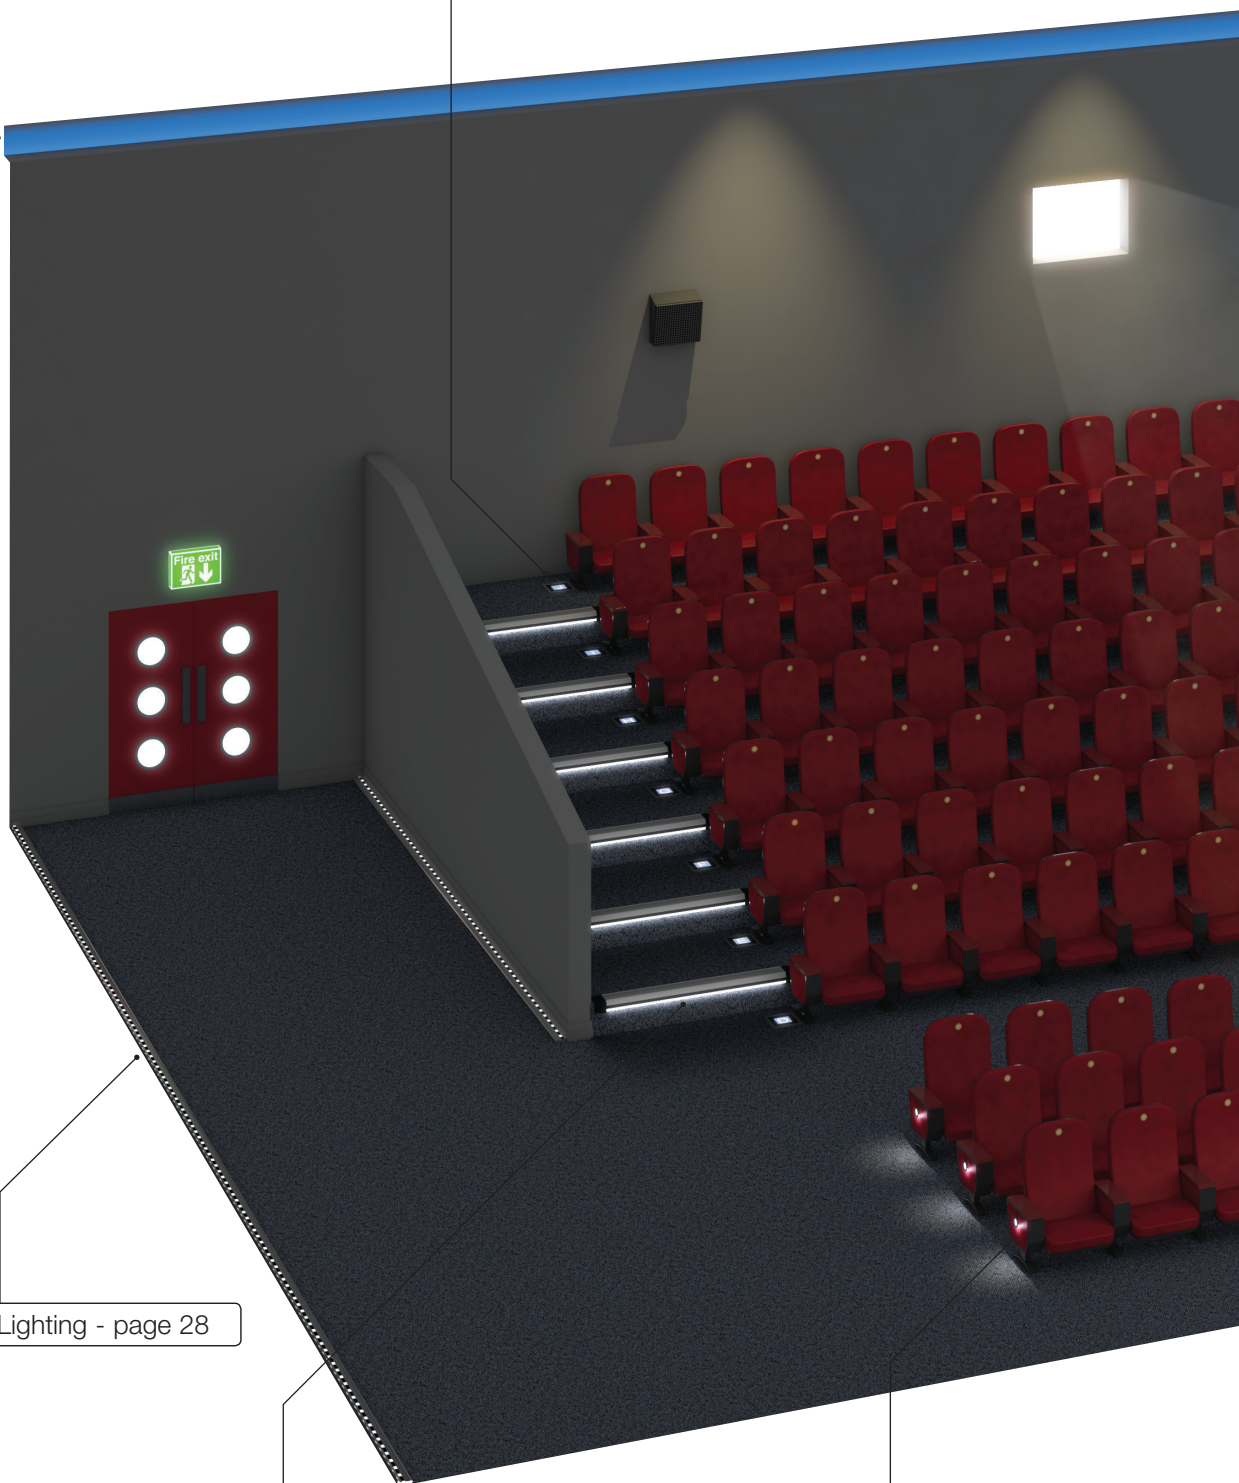

Aisle & Floor Trim Lighting - page 28

Continuity Step Lighting - page 12

Seat Lighting / Seat Row Indicator - page 36

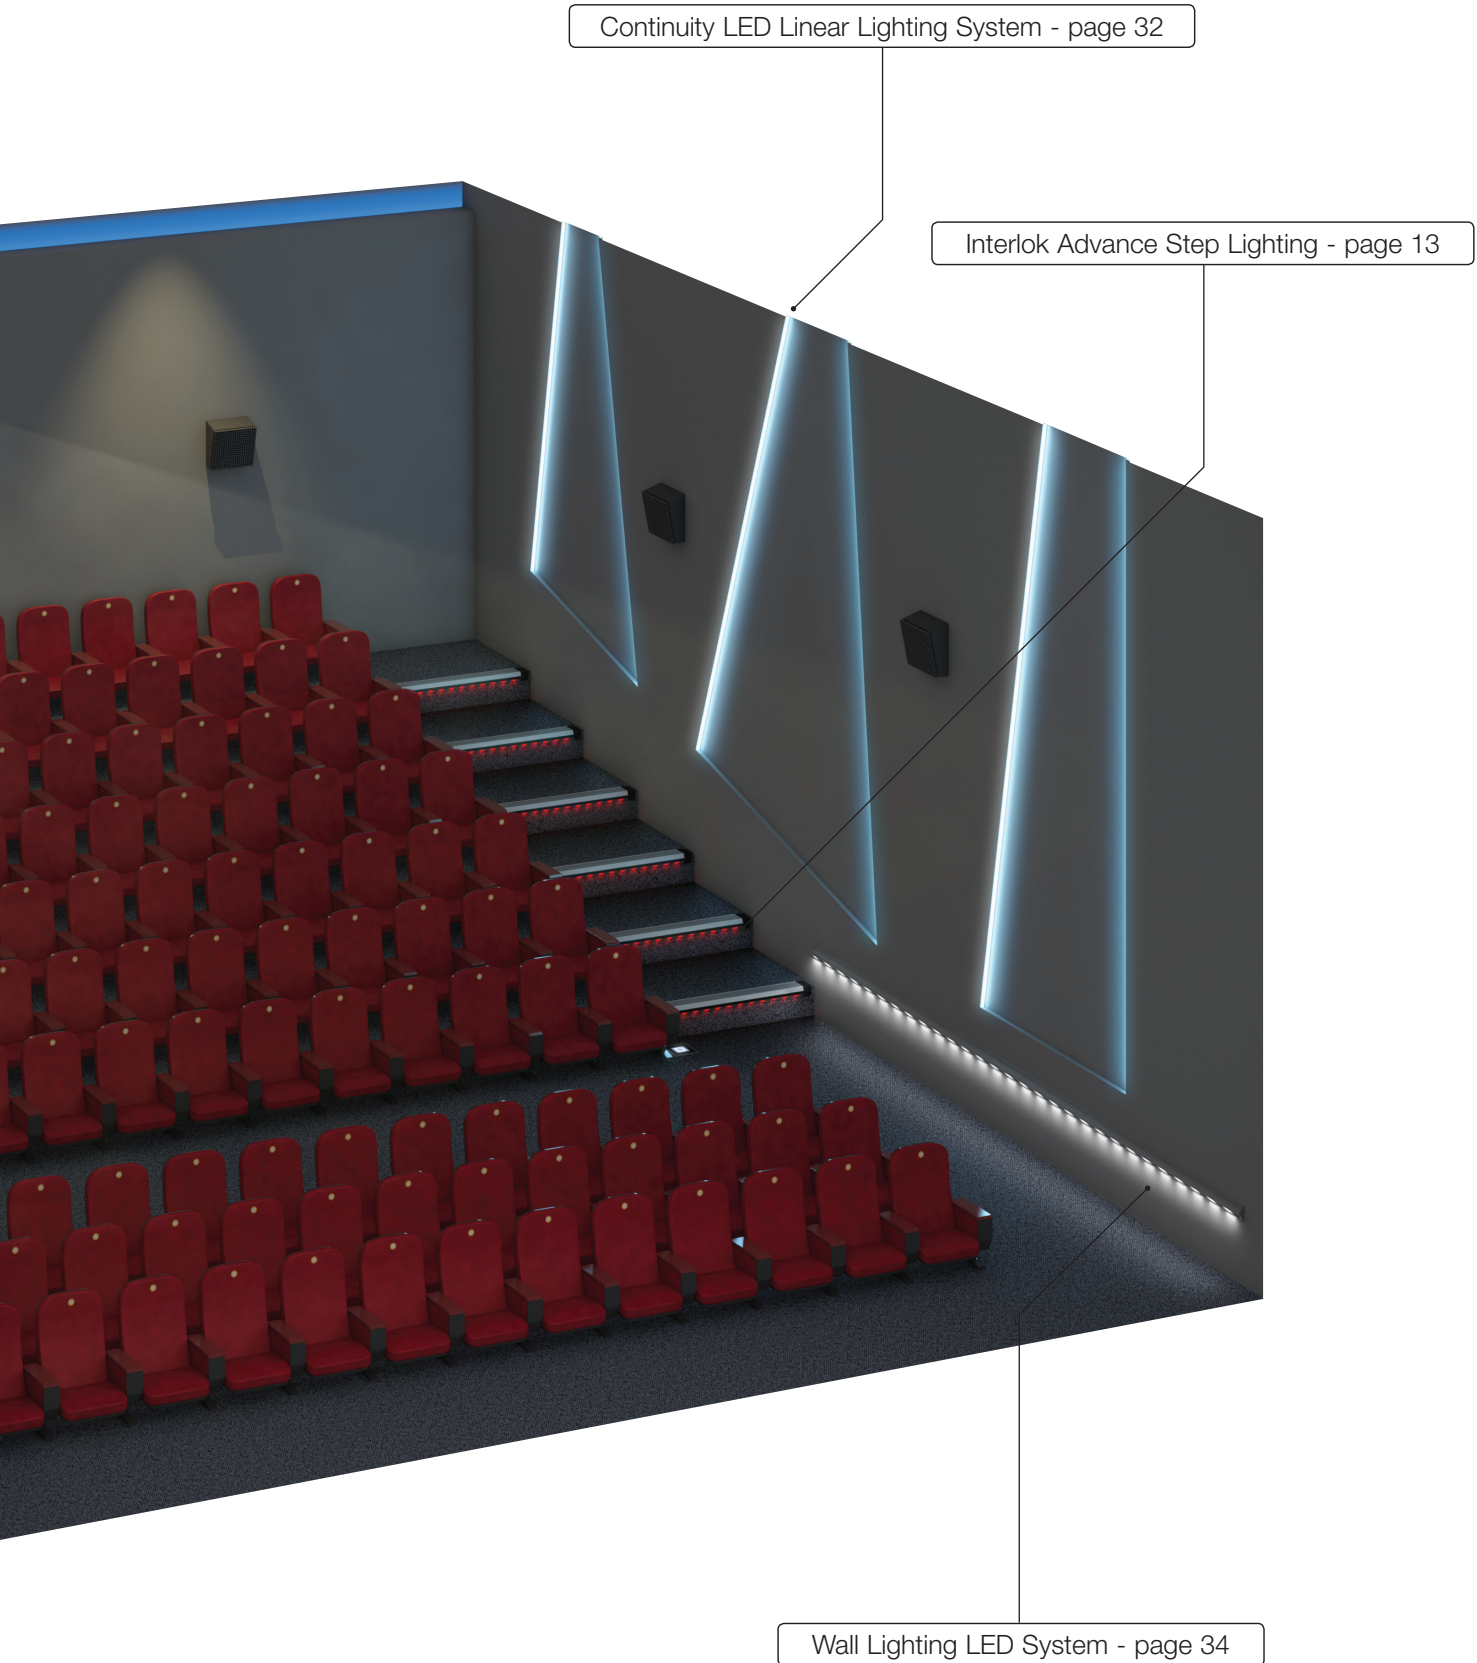


Continuity LED Linear Lighting System - page 32

Interlok Advance Step Lighting - page 13


Wall Lighting LED System - page 34



Illustration of a Step System

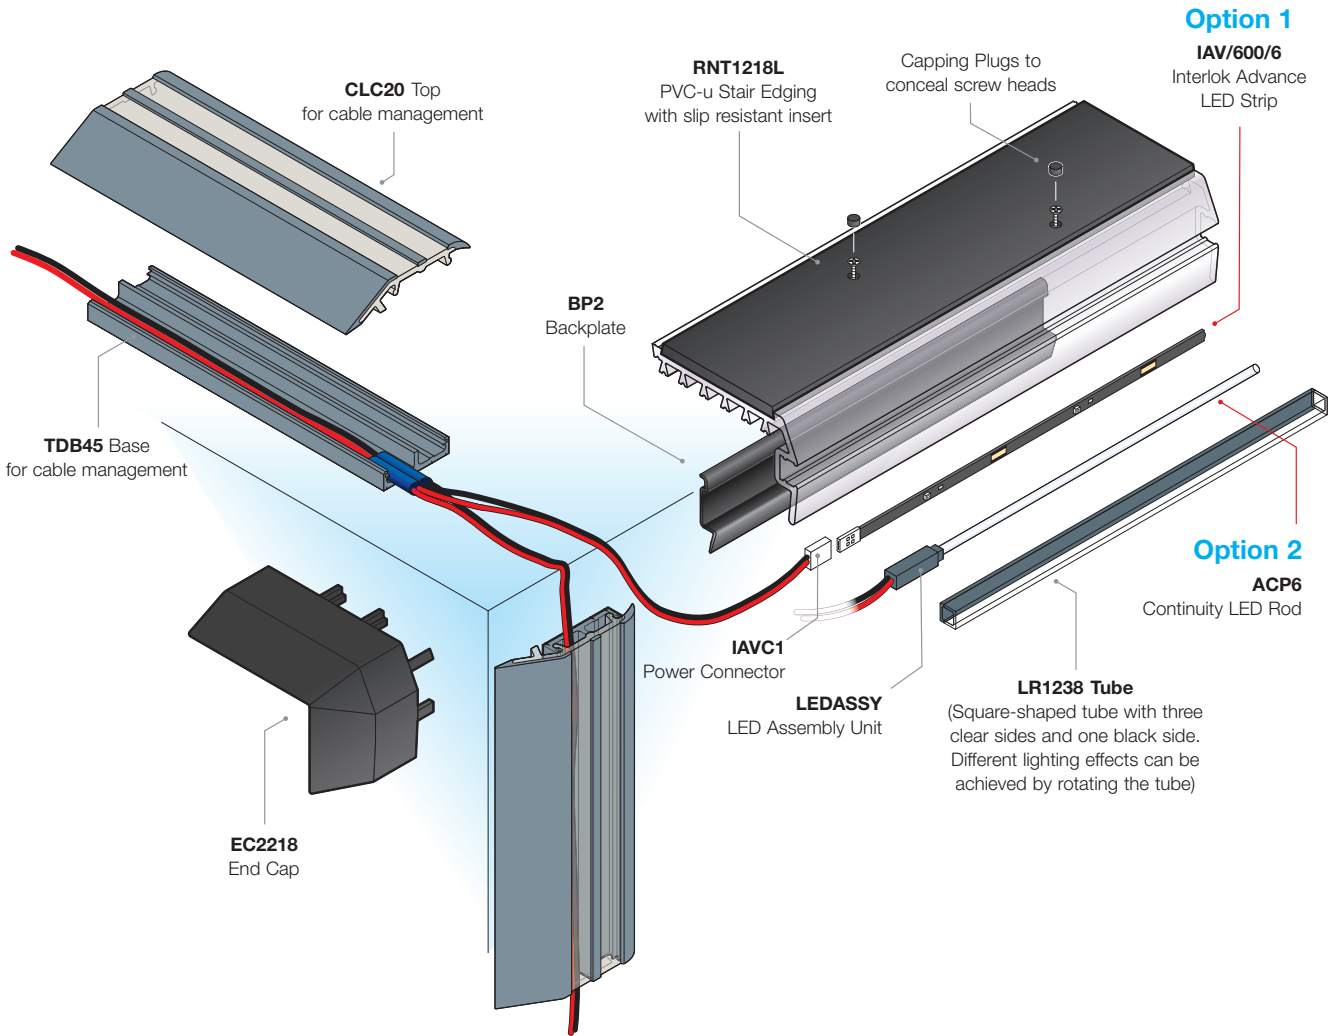


Interlok Advance™

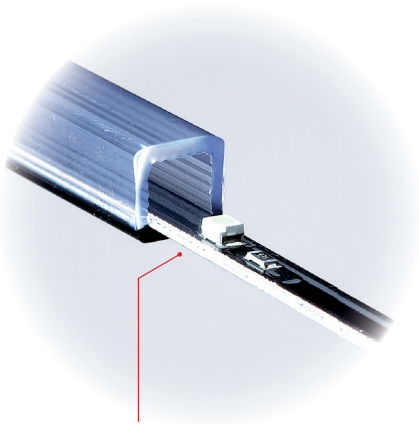

Option 1
IAV/600/6
Interlok Advance LED Strip
inserted into LR1238 Tube

Continuity™

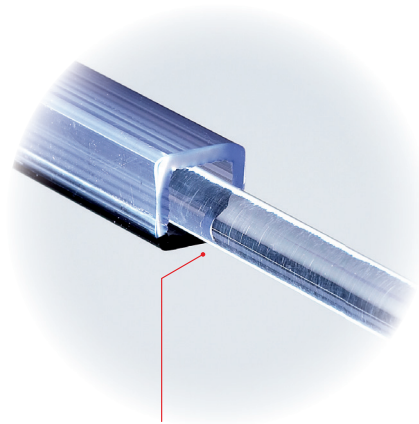

Option 2
ACP6
Continuity LED Rod
inserted into LR1238 Tube



Illuminated Stair Edgings

A range of safety and decorative lighting profiles for stairs that have been designed specifically to suit interior environments such as auditoria, where light is required for safety to protect the public from slips, trips and falls.

Continuity™ 12v DC LED Lighting System





Description

Continuity™ is an LED lighting system that provides a continuous linear lighting effect for a streamlined modern finish.

- Continuous lighting effect
- LED housed in polycarbonate assembly unit. Light is projected through the fibre optic rod
- Sealed LED system provides resistance to moisture ingress e.g. soft drink spillage
- Supplied per metre
- LED lifetime of up to 50,000 hours
- Power consumption of 0.3 watts per LED
- Dimming options available see page 42
- For power supply units see page 42

LED choice	
	Blue
	Green
	Amber
	Red
	White

Typical Example

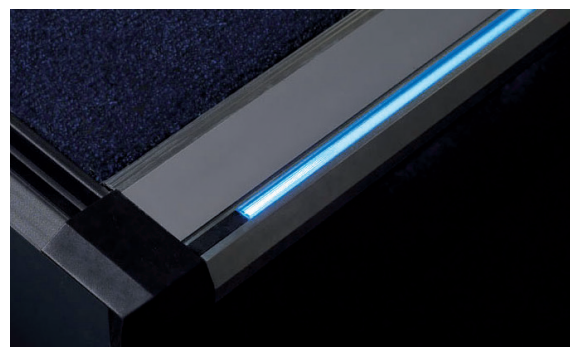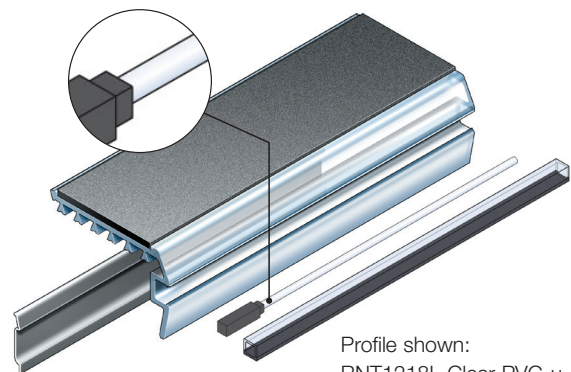

Profile Shown: ATD121L

Interlok Advance™ 12v DC LED Lighting System





Description

Interlok Advance™ is an LED lighting system that offers a pin point lighting effect.

- Pin point light effect
- LEDs are surface mounted onto strips
- Strips can be cut to desired length without causing any reduction in brightness (600mm strips)
- LED lifetime of up to 50,000 hours
- Power consumption of 1.8 watts per strip
- LEDs are spaced at 100mm intervals
- Dimming options available see page 42
- For power supply units see page 42

LED choice	
	Blue
	Green
	Amber
	Red
	White

Typical Example

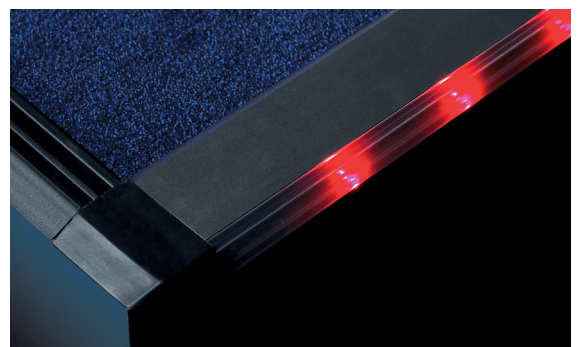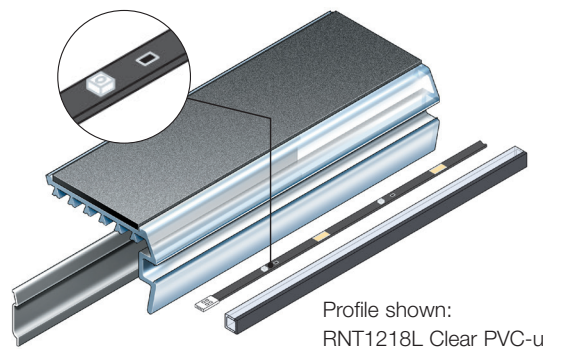

Profile Shown: RXT1218L

Step Lighting Effects



Description

Gradus lighting offers a range of aluminium and PVC-u stair edging profiles, with a choice of slip resistant inserts, which incorporate LED lighting systems that are designed to provide a wide choice of lighting effects.

By altering the position of the Interlok Advance LED strips or by rotating the PVC LR1238 tube (PVC tube with three clear sides and one black side as seen in diagrams opposite) within the profile, a variety of different lighting effects can be achieved (see opposite).

PVC-u

- Clear profile allows light to project through the profile
- Illuminated stair edging is visible when ascending and descending the staircase


Aluminium

- Light is projected directly from the tube
- The angle at which the illumination is visible depends on the profile design



PVC Profiles

Up & Down




Clear PVC-u - allows light to project through the profile

Step lighting effect available in the following profiles:

RNT1218L - pg19, RNT718L - pg19

Up & Angled




Clear PVC-u - allows light to project through the profile

Step lighting effect available in the following profile:

RXT1218L - pg18

Up, Forward & Down




Clear PVC-u - allows light to project through the profile

Step lighting effect available in the following profiles:

RNT1218L - pg19, RNT718L - pg19

Aluminium Profiles

Angled Up




Aluminium

Step lighting effect available in the following profiles:

ATNG71L - pg22, ELAF5150 - Pg23, ELAF230 - pg23

Up & Down




Aluminium

Step lighting effect available in the following profiles:

ATD121L - pg21, ATD71L - Pg20

Up




Aluminium

Step lighting effect available in the following profiles:

ATD121L - pg21, ATF71L - pg20, ATD71L - Pg20

Forward




Aluminium

Step lighting effect available in the following profiles:

AT718L - pg21, AS1106L - pg22, ATF71L - pg20

Down




Aluminium

Step lighting effect available in the following profiles:

ATD121L - pg21, ATD71L - Pg20

Up & Forward



Aluminium

Step lighting effect available in the following profile:

ATF71L - pg20



Stair Edging Profiles


PVC-u Profiles

Gradus illuminated PVC-u stair edgings feature clear PVC-u channels that allow light to project through the profiles. This ensures that the step edge is clearly visible when both ascending and descending the staircase, offering additional safety plus an enhanced design feature.

Available in two gauges (7mm and 12mm) to accommodate different floorcoverings, the profiles combine hardwearing PVC-u channels with a choice of slip-resistant pvc inserts.

The profiles can incorporate either the Continuity or Interlok Advance LED lighting systems. The square tube (LR1238) that houses the lighting system has three clear sides and one solid black side. By rotating the tube, the light can be projected in the desired direction. This gives the option of multiple lighting effects simply by rotating the position of the tube (see page 15).

End caps are available for all profiles to provide neat finishing and to conceal cables.

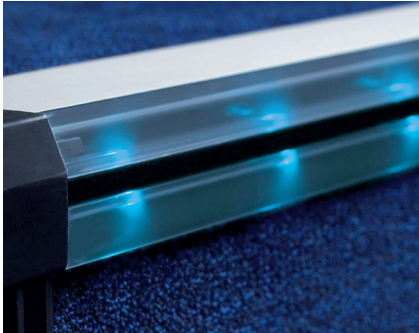


Aluminium Profiles

Gradus illuminated aluminium stair edging profiles combine hardwearing mill finish aluminium channels with a choice of slip-resistant pvc inserts. Black anodised finish is available as an option for all aluminium profiles. ELAF5150 is black anodised as standard (Pg23).

Available in a variety of gauges from ramp back through to 12mm, profiles incorporate a PVC-u tube that fits securely into the channel and houses either the Continuity or Interlok Advance LED lighting systems.

Profiles offer either single or double lighting options that can be used to create a range of lighting effects including forward illumination, top and down illumination, top and forward illumination and angled illumination.


End caps are available for all profiles to provide neat finishing and to conceal cables.

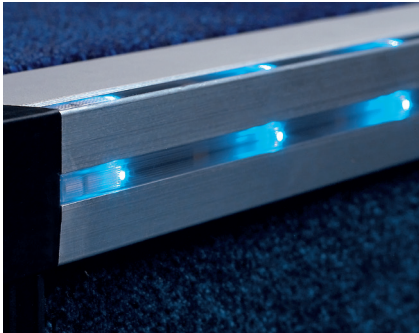

Step Lighting Effects


Interlok Advance™

- Interlok Advance is an LED lighting system that offers a pinpoint lighting effect
- The Interlok Advance effect is created using circuit board strips with LEDs spaced at 100mm intervals

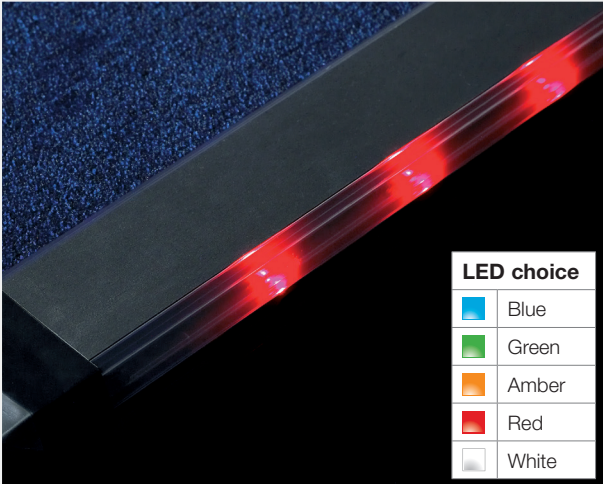

Continuity™

- Continuity is an LED lighting system that offers a continuous linear lighting effect for a streamlined, modern finish.
- The Continuity lighting effect is created using a fibre optic rod that is end-illuminated with high intensity LEDs

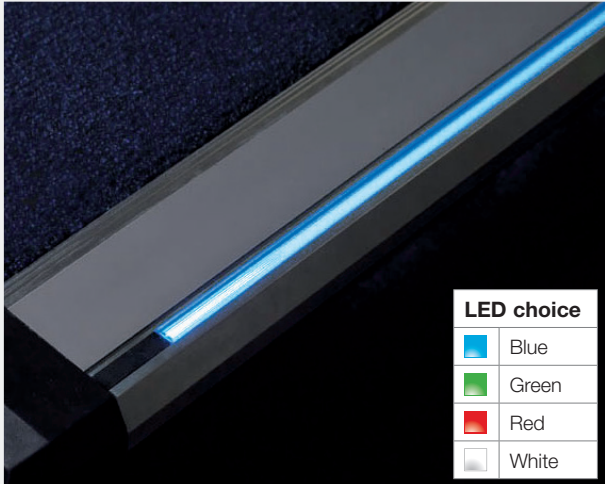


PVC-u Stair Edging Profiles

RXT1218L


Description

The RXT1218L stair edging profile offers the ultimate solution to help reduce the risk of slips, trips and falls on stairs in most applications.

This profile also gives the option of multiple lighting effects, simply by rotating the position of the LR1238 tube.

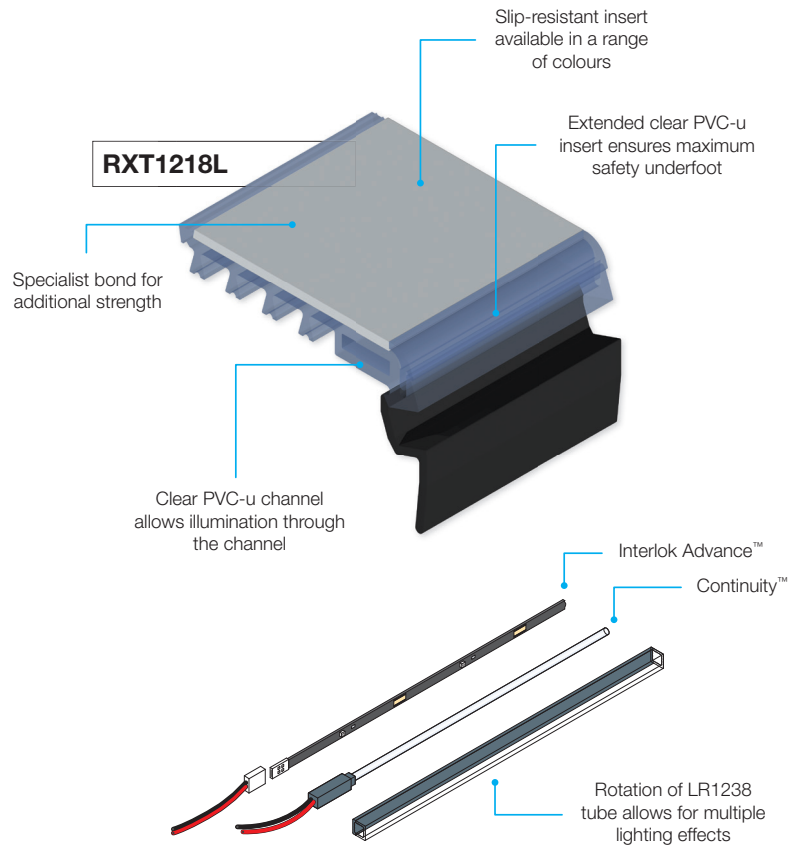

MULTIPLE LIGHTING EFFECTS

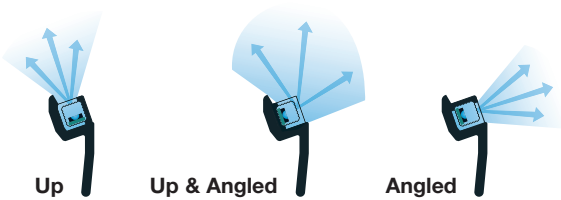

DESCRIPTION:

- Clear/Black PVC-u Channel
- Up & angled illumination
- For use with carpet

LENGTH:

- 2.44m / 2.75m / 3.2m

INSERT AVAILABILITY:

- Interior

LED COLOUR AVAILABILITY

CONTINUITY™ & INTERLOK ADVANCE™

- Blue
- Green
- Amber
- Red
- White

CONTINUITY™		INTERLOK ADVANCE™	
			
LED LEDASSY	FIBRE OPTIC ROD ACP6	LED IAV/600/6	CONNECTOR IAVC1
			
TUBE LR1238	END CAP EC3218	TUBE LR1238	END CAP EC3218

For insert selection see pages 24-25. Products subject to minor design alterations without notice.

RNT1218L		CONTINUITY™		
		<p>LED LEDASSY</p>	<p>FIBRE OPTIC ROD ACP6</p>	
<p> Profile can be curved subject to approval of template</p>		<p>TUBE LR1238</p>	<p>END CAP EC2218</p>	<p>BACKING PLATE BP2</p>
INTERLOK ADVANCE™				
<p>DESCRIPTION:</p> <ul style="list-style-type: none"> • Clear PVC-u Channel • Illumination on front gives all round visibility • For use with carpet <p>LENGTH:</p> <ul style="list-style-type: none"> • 2.44m / 2.75m / 3.2m <p>INSERT AVAILABILITY:</p> <ul style="list-style-type: none"> • Xtra-grip • Xtra-grip Plus • Interior 		<p>LED COLOUR AVAILABILITY</p> <p>CONTINUITY™ & INTERLOK ADVANCE™</p> <ul style="list-style-type: none"> Blue Green Amber Red White 		
		<p>LED IAV/600/6</p>	<p>CONNECTOR IAVC1</p>	
		<p>TUBE LR1238</p>	<p>END CAP EC2218</p>	<p>BACKING PLATE BP2</p>

RNT718L		CONTINUITY™		
		<p>LED LEDASSY</p>	<p>FIBRE OPTIC ROD ACP6</p>	
<p> Profile can be curved subject to approval of template</p>		<p>TUBE LR1238</p>	<p>END CAP ECT718L</p>	<p>BACKING PLATE BP3</p>
INTERLOK ADVANCE™				
<p>DESCRIPTION:</p> <ul style="list-style-type: none"> • Clear PVC-u Channel • Illumination on front gives all round visibility • For use with carpet <p>LENGTH:</p> <ul style="list-style-type: none"> • 2.44m / 2.75m / 3.2m <p>INSERT AVAILABILITY:</p> <ul style="list-style-type: none"> • Xtra-grip • Xtra-grip Plus • Interior 		<p>LED COLOUR AVAILABILITY</p> <p>CONTINUITY™ & INTERLOK ADVANCE™</p> <ul style="list-style-type: none"> Blue Green Amber Red White 		
		<p>LED IAV/600/6</p>	<p>CONNECTOR IAVC1</p>	
		<p>TUBE LR1238</p>	<p>END CAP ECT718L</p>	<p>BACKING PLATE BP3</p>

For power supply units see page 42.

Aluminium Stair Edging Profiles

ATF71L		CONTINUITY™		
<p>Profile can be curved subject to approval of template</p>		<p>LED LEDASSY</p>	<p>FIBRE OPTIC ROD ACP6</p>	
<p>DESCRIPTION:</p> <ul style="list-style-type: none"> Aluminium channel (also available black anodised) Illumination on tread and riser For use with carpet <p>LENGTH:</p> <ul style="list-style-type: none"> 2.44m / 2.75m / 3.2m <p>INSERT AVAILABILITY:</p> <ul style="list-style-type: none"> Xtra-grip Xtra-grip Plus Interior 		<p>LED COLOUR AVAILABILITY</p> <p>CONTINUITY™ & INTERLOK ADVANCE™</p> <ul style="list-style-type: none"> Blue Green Amber Red White 	<p>TUBE LR1238</p>	<p>END CAP ECF71L</p>
		INTERLOK ADVANCE™		
		<p>LED IAV/600/6</p>	<p>CONNECTOR IAVC1</p>	
		<p>TUBE LR1238</p>	<p>END CAP ECF71L</p>	
ATD71L		CONTINUITY™		
<p>Profile can be curved subject to approval of template</p>		<p>LED LEDASSY</p>	<p>FIBRE OPTIC ROD ACP6</p>	
<p>DESCRIPTION:</p> <ul style="list-style-type: none"> Aluminium channel (also available black anodised) Illumination on tread and/or riser For use with carpet <p>LENGTH:</p> <ul style="list-style-type: none"> 2.44m / 2.75m / 3.2m <p>INSERT AVAILABILITY:</p> <ul style="list-style-type: none"> Xtra-grip Xtra-grip Plus Interior 		<p>LED COLOUR AVAILABILITY</p> <p>CONTINUITY™ & INTERLOK ADVANCE™</p> <ul style="list-style-type: none"> Blue Green Amber Red White 	<p>TUBE LR1238</p>	<p>END CAP ECF71L</p>
		INTERLOK ADVANCE™		
		<p>LED IAV/600/6</p>	<p>CONNECTOR IAVC1</p>	
		<p>TUBE LR1238</p>	<p>END CAP ECF71L</p>	

For insert selection see pages 24-25. Products subject to minor design alterations without notice.

ATD121L		CONTINUITY™		
		<p>LED LEDASSY</p>	<p>FIBRE OPTIC ROD ACP6</p>	
<p>DESCRIPTION:</p> <ul style="list-style-type: none"> Aluminium channel (also available black anodised) Illumination on tread and/or riser For use with carpet <p>LENGTH:</p> <ul style="list-style-type: none"> 2.44m / 2.75m / 3.2m <p>INSERT AVAILABILITY:</p> <ul style="list-style-type: none"> Xtra-grip Xtra-grip Plus Interior 		<p>LED COLOUR AVAILABILITY</p> <p>CONTINUITY™ & INTERLOK ADVANCE™</p> <ul style="list-style-type: none"> Blue Green Amber Red White 	<p>TUBE LR1238</p>	<p>END CAP ECTD121L</p>
INTERLOK ADVANCE™				
		<p>LED IAV/600/6</p>	<p>CONNECTOR IAVC1</p>	
		<p>TUBE LR1238</p>	<p>END CAP ECTD121L</p>	

AT718L		CONTINUITY™	
		<p>LED LEDASSY</p>	<p>FIBRE OPTIC ROD ACP6</p>
<p> Profile can be curved subject to approval of template</p>		<p>TUBE LR1238</p>	<p>END CAP ECT718L</p>
INTERLOK ADVANCE™			
<p>DESCRIPTION:</p> <ul style="list-style-type: none"> Aluminium channel (also available black anodised) Step front illumination For use with carpet <p>LENGTH:</p> <ul style="list-style-type: none"> 2.44m / 2.75m / 3.2m <p>INSERT AVAILABILITY:</p> <ul style="list-style-type: none"> Xtra-grip Xtra-grip Plus Interior 		<p>LED COLOUR AVAILABILITY</p> <p>CONTINUITY™ & INTERLOK ADVANCE™</p> <ul style="list-style-type: none"> Blue Green Amber Red White 	<p>CONNECTOR IAVC1</p>
		<p>LED IAV/600/6</p>	<p>END CAP ECT718L</p>
		<p>TUBE LR1238</p>	<p>END CAP ECT718L</p>

For power supply units see page 42.

Aluminium Stair Edging Profiles

ATNG71L		CONTINUITY™		
		<p>LED LEDASSY</p>	<p>FIBRE OPTIC ROD ACP6</p>	
		<p>TUBE LR1238</p>	<p>END CAP ECNG71L</p>	
<p>DESCRIPTION:</p> <ul style="list-style-type: none"> Aluminium channel (also available black anodised) Angled illumination For use with carpet <p>LENGTH:</p> <ul style="list-style-type: none"> 2.44m / 2.75m / 3.2m <p>INSERT AVAILABILITY:</p> <ul style="list-style-type: none"> Xtra-grip Xtra-grip Plus Interior 		<p>LED COLOUR AVAILABILITY</p> <p>CONTINUITY™ & INTERLOK ADVANCE™</p> <ul style="list-style-type: none"> Blue Green Amber Red White 	<p style="text-align: center;">INTERLOK ADVANCE™</p>	
		<p>LED IAV/600/6</p>	<p>CONNECTOR IAVC1</p>	
		<p>TUBE LR1238</p>	<p>END CAP ECNG71L</p>	
AS1106L		CONTINUITY™		
		<p>LED LEDASSY</p>	<p>FIBRE OPTIC ROD ACP6</p>	
		<p>TUBE LR1238</p>	<p>END CAP EC1106L</p>	
<p> Profile can be curved subject to approval of template</p>		<p style="text-align: center;">INTERLOK ADVANCE™</p>		
<p>DESCRIPTION:</p> <ul style="list-style-type: none"> Aluminium channel (also available black anodised) Step front illumination For use with resilient flooring or where no surface floorcoverings are used <p>LENGTH:</p> <ul style="list-style-type: none"> 2.44m / 2.75m / 3.2m <p>INSERT AVAILABILITY:</p> <ul style="list-style-type: none"> Xtra-grip Xtra-grip Plus Interior 		<p>LED COLOUR AVAILABILITY</p> <p>CONTINUITY™ & INTERLOK ADVANCE™</p> <ul style="list-style-type: none"> Blue Green Amber Red White 	<p>LED IAV/600/6</p>	
		<p>CONNECTOR IAVC1</p>	<p>END CAP EC1106L</p>	
		<p>TUBE LR1238</p>	<p>END CAP EC1106L</p>	






















For insert selection see pages 24-25. Products subject to minor design alterations without notice.

ELAF230		CONTINUITY™		
		<p>LED LEDSLLEEVE</p>	<p>FIBRE OPTIC ROD ACP6</p>	
		<p>COVER IC10CL</p>	<p>END CAP ECELAF</p>	<p>CARRIER CRH5</p>
		INTERLOK ADVANCE™		
<p>DESCRIPTION:</p> <ul style="list-style-type: none"> Aluminium channel (also available black anodised) Angled illumination For use with carpet <p>LENGTH:</p> <ul style="list-style-type: none"> 2.44m / 2.75m / 3.2m <p>INSERT AVAILABILITY:</p> <ul style="list-style-type: none"> Interior (ELINS30 insert sold separately) Xtra-grip (ELINSXG30 insert sold separately) 		<p>LED COLOUR AVAILABILITY</p> <p>CONTINUITY™ & INTERLOK ADVANCE™</p> <ul style="list-style-type: none"> Blue Green Amber Red White 	<p>LED IAV/600/6</p>	<p>CONNECTOR IAVC1</p>
		<p>COVER IC10CL</p>	<p>END CAP ECELAF</p>	<p>BACKING PLATE IS9</p>
ELAF5150		CONTINUITY™		
<p>Can be supplied preassembled</p>		<p>LED LEDASSY</p>	<p>FIBRE OPTIC ROD ACP6</p>	<p>TUBE LR1238</p>
		<p>Incorporates step row indicator</p> <p>END CAP EC5150RHI</p>		<p>END CAP EC5150RH</p>
		INTERLOK ADVANCE™		
<p>DESCRIPTION:</p> <ul style="list-style-type: none"> Black anodised aluminium channel Angled illumination For use with thin gauge carpet End cap can be selected to incorporate a step row indicator Can be supplied preassembled for ease of installation <p>LENGTH:</p> <ul style="list-style-type: none"> 2.44m / 2.75m / 3.2m <p>INSERT AVAILABILITY:</p> <ul style="list-style-type: none"> Interior (ELINS50 insert sold separately) Xtra-grip (ELINSXG50 insert sold separately) 		<p>LED COLOUR AVAILABILITY</p> <p>CONTINUITY™ & INTERLOK ADVANCE™</p> <ul style="list-style-type: none"> Blue Green Amber Red White 	<p>LED IAV/600/6</p>	<p>CONNECTOR IAVC1</p>
		<p>Incorporates step row indicator</p> <p>END CAP EC5150RHI</p>		<p>END CAP EC5150RH</p>












For power supply units see page 42.

Insert Colours












Interior Standard Finish

Jet* LRV: 4.56 NCS: 8502-B 	Ink LRV: 4.96 NCS: 8010-R70B 	Burgundy LRV: 5.70 NCS: 6030-R10B 	Coffee* LRV: 6.05 NCS: 8010-Y50R 	Midnight LRV: 6.56 NCS: 6030-R80B 	Evergreen LRV: 6.69 NCS: 7020-B70G 
Ocean LRV: 8.00 NCS: 6020-R90B 	Poppy LRV: 10.39 NCS: 2070-R 	Lead* LRV: 12.77 NCS: 7005-R50B 	Steel* LRV: 26.99 NCS: 4500-N 	Cloud LRV: 28.57 NCS: 4010-R70B 	Linen LRV: 38.59 NCS: 3010-Y30R 
Glacier LRV: 42.09 NCS: 2502-B 	Clay† LRV: 47.97 NCS: S2502-Y 	Sky† LRV: 52.63 NCS: S1515-R90B 	Canvas LRV: 53.27 NCS: 2005-Y30R 	Jade† LRV: 53.98 NCS: S2005-G 	Buttercup LRV: 55.54 NCS: 1070-Y 
Photoluminescent LRV: 57.59 - lit conditions 	Wisp† LRV: 58.17 NCS: S2000-N 	Snowdrift* LRV: 83.77 NCS: 0500-N 	†RXT1218L profile only *ELINS30 colour availability		

NEW Xtra-grip™


Onyx LRV: 4.52 NCS: 8502-B 	Neptune LRV: 5.03 NCS: 8010-R70B 	Umber LRV: 5.71 NCS: 8005-Y50R 	Graphite LRV: 12.56 NCS: 6502-B 	Quarry LRV: 24.71 NCS: 4500-N 	Concrete LRV: 37.44 NCS: 2502-B 
Ochre LRV: 49.97 NCS: 1060-Y 	Surf LRV: 43.58 NCS: 1515-R90B 	Pumice LRV: 46.83 NCS: 2005-Y30R 	Bamboo LRV: 45.84 NCS: 2005-B80G 	Frost LRV: 66.51 NCS: 1002-G50Y 	*ELINSXG30 & ELINSXG50 colour availability

NEW Xtra-grip Plus™

Asphalt LRV: 4.52 NCS: 8502-B 	Shark LRV: 5.03 NCS: 8010-R70B 	Bark LRV: 5.71 NCS: 8005-Y50R 	Mercury LRV: 12.56 NCS: 6502-B 	Smoke LRV: 24.71 NCS: 4500-N 	Dusk LRV: 37.44 NCS: 2502-B 
Citrine LRV: 49.97 NCS: 1060-Y 	Air LRV: 43.58 NCS: 1515-R90B 	Sandstone LRV: 46.83 NCS: 2005-Y30R 	Prairie LRV: 45.84 NCS: 2005-B80G 	Calcite LRV: 66.51 NCS: 1002-G50Y 	

Interior Grained Finish

Black LRV: 6.47 NCS: 7502-B 	Brown LRV: 12.13 NCS: 6010-Y70R 
Granite LRV: 13.44 NCS: 6502-R 	Dove LRV: 23.40 NCS: 5000-N 



For samples

For enquiries in the UK & Eire

Tel: 01625 428922

For enquiries outside the UK & Eire

contact Gradus International

Tel: +44 (0)1625 613780

Visit: www.gradusworld.com

NCS Colour References



Gradus is a member of NCS (Natural Colour System) and utilises the NCS reference codes shown above each colour. For further information visit www.ncscolour.co.uk

©Property of and used under licence from the Scandinavian Colour Institute AB, SCI-Sweden se, Stockholm 2004.
 See www.ncscolour.co.uk for NCS-standard samples.

Light Reflectance Value (LRV)

All colours have been measured for light reflectance/visual contrast (LRV using CIE Y value). For details on LRV's visit www.gradusworld.com or call technical support on 01625 428922

Please note: Due to the limitations of the printing process, colours within this leaflet should not be relied upon for colour matching.

An accurate colour match can only be achieved by requesting the relevant product sample(s).

How to select the correct insert

Gradus Inserts:


- Provide slip-resistance at the step edge to reduce the risk of slips, trips and falls on stairs
- Are designed and tested to ensure optimum performance throughout the life of the product
- Are measured for Light Reflectance Values (LRVs) to provide a visual contrast to ensure the step edge is clearly visible

Pendulum Test Value (PTV)	Slip Potential
0 - 24	High Slip Potential
25 - 35	Moderate Slip Potential
36+	Low Slip Potential

Wear Classification* - All Gradus inserts achieve wear classifications of: Group T - Class 34 - Commercial Very Heavy; Group T - Class 43 - Light Industrial Heavy.


* Interior (standard & grained) tested to BS EN 660-2:1999 and assessed against the requirements of BS EN 649:1997
Xtra-grip and Xtra-grip Plus tested to BS EN 13845:2005 - 50,000 cycles

Xtra-grip™




- Suitable for interior steps that may become wet
- Pvc insert incorporating a slip-resistant aggregate
- Low slip risk in both wet & dry conditions
- PTV rating: Dry - Low (PTV Av. 70) Wet - Low (PTV Av. 64)

Xtra-grip Plus™



- As Xtra-grip, with the addition of an enhanced insert bond system for areas subject to more frequent cleaning e.g. catering and food preparation areas
- PTV rating: Dry - Low (PTV Av. 70) Wet - Low (PTV Av. 64)

Interior (standard or grained)

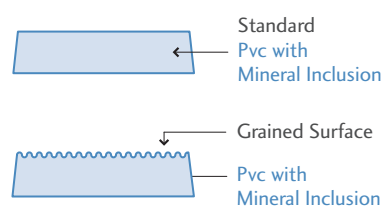

- Suitable for interior dry conditions where there is no risk that the stairs will be contaminated by moisture
- Pvc material with slip-resistant properties
- PTV rating: Dry - Low (PTV Av. 68)



Floor Trim Lighting Systems

A comprehensive range of PVC-u and aluminium aisle and floor trims that are designed for use as cable management systems to work with illuminated stair edging profiles, or to illuminate floors, walkways, aisles and exit/entrance routes.

Aisle & Floor Trim Lighting



Description


Gradus offers a comprehensive range of PVC-u and aluminium aisle and floor trims that are designed for use as cable management systems to work with illuminated stair edging profiles or to illuminate floors, walkways, aisles and exit/entrance routes.

Profiles can feature Interlok Advance, Continuity or Loom Lighting. See Pages 12 & 13 for details of Continuity and Interlok Advance.


Loom information







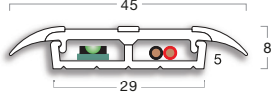


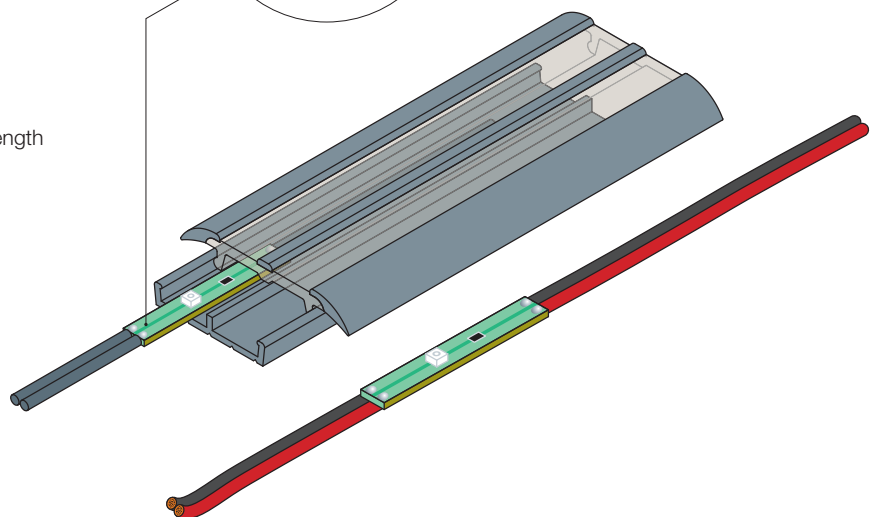


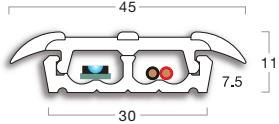





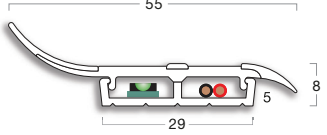





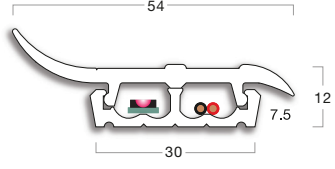





- LEDs are spaced at 300mm intervals
- Easy to install and can be cut to required length
- Can be supplied in 1 to 50 metre coils
- LED lifetime of up to 50,000 hours
- Power consumption of 0.9 watts per metre

Typical Example





Floor Loom shown with CLS13/LBS45







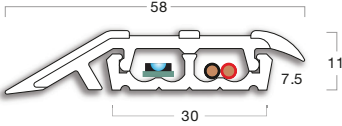













CODE / PROFILE	DESCRIPTION	DETAILS	LENGTH	PROFILE COLOUR	LIGHTING SYSTEM	LED COLOUR AVAILABILITY
CL05/LB10 	PVC-u floor trim	Carpet to Carpet	2.5m	Smoked/Black Clear Translucent	Loom or Interlok Advance	 Blue  Green  Amber  Red  White
CLS13/LBS45 	PVC-u floor trim/cable management system	Carpet to Carpet	2.5m	Smoked/Black Clear Translucent	Interlok Advance	 Blue  Green  Amber  Red  White
CLC13/TDB45 	PVC-u floor trim/cable management system	Carpet to Carpet	2.5m	Smoked/Black Clear Translucent	Loom or Interlok Advance	 Blue  Green  Amber  Red  White
CLS16/LBS45 	PVC-u floor trim/cable management system	Carpet to Wall	2.5m	Smoked/Black Clear Translucent	Interlok Advance	 Blue  Green  Amber  Red  White
CLC16/TDB45 	PVC-u floor trim/cable management system	Carpet to Wall	2.5m	Smoked/Black Clear Translucent	Loom or Interlok Advance	 Blue  Green  Amber  Red  White



For power supply units see page 42. Illustrations not to size. Products subject to minor design alterations without notice.

Key	
Cable	
Lighting Loom or Interlok Advance	

Aisle & Floor Trim Lighting

CODE / PROFILE	DESCRIPTION	DETAILS	LENGTH	PROFILE COLOUR	LIGHTING SYSTEM	LED COLOUR AVAILABILITY
CLS20/LBS45 	PVC-u floor trim/cable management system	Vinyl to Carpet	2.5m	Smoked/Black Clear Translucent	Interlok Advance	<ul style="list-style-type: none">  Blue  Green  Amber  Red  White
CLC20/TDB45 	PVC-u floor trim/cable management system	Vinyl to Carpet	2.5m	Smoked/Black Clear Translucent	Loom or Interlok Advance	<ul style="list-style-type: none">  Blue  Green  Amber  Red  White
DLA45 	Aluminium U section	Suitable for floor, wall or ceiling mounting	3.1m	Aluminium - Mill finish Can also be supplied anodised on request	Interlok Advance or Continuity	<ul style="list-style-type: none">  Blue  Green  Amber  Red  White

For power supply units see page 42. Illustrations not to size. Products subject to minor design alterations without notice.

Key	
Cable	
Lighting Loom or Interlok Advance	

Lighting Systems

Systems that can be used to visually enhance any leisure application whilst providing guidance to the public & creating a safe environment. Bespoke products and adaptations of existing products can be produced to create specific light effects for customised applications.


Continuity™ - Linear Lighting System








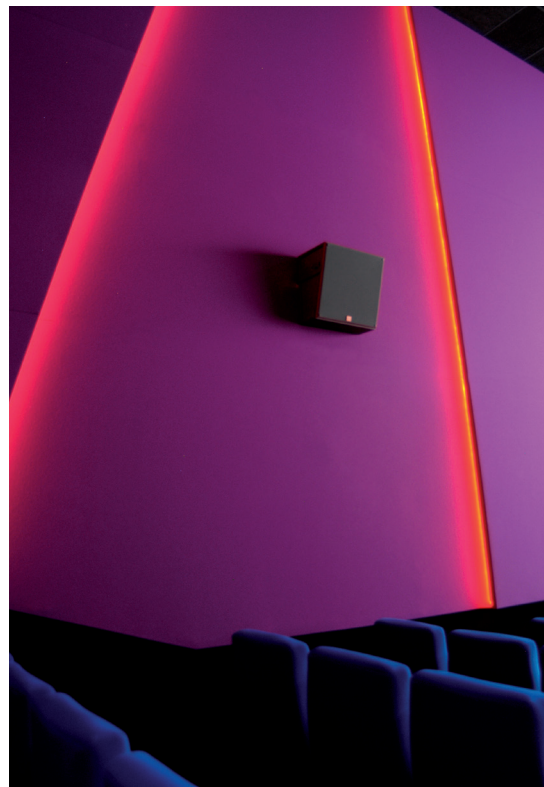


Description


Continuity™ LED linear lighting offers an excellent alternative to neon lighting for interior applications.

- Extra low voltage alternative to neon lighting
- Low Power consumption – 4.8 - 15.00 watts/metre dependant on standard or high brightness
- Lifecycle – effective up to 50,000 hours
- Flexibility allows designers to create bespoke designs
- Easily shaped and installed on site – shock and vibration proof
- Flexible up to a minimum radius of 40mm
- Low heat output means it is safe in use
- LED strip can be cut at short intervals
- Static colours and RGB available
- PVC-u cover available as Clear (CL) or Opaque (FR)



PROFILE	ENVIRONMENT	SIZE	LED COLOUR AVAILABILITY
<p>DC2012/DLA2415</p> 	<p>Interior</p>	<p>LED 5m DC2012 PVC-u Cover 2m DLA2415 Aluminium Carrier 2m</p>	<ul style="list-style-type: none">  Blue  Green  Amber  Red  Warm White  White  RGB Colour Change

Illustrations not to size. Products subject to minor design alterations without notice.

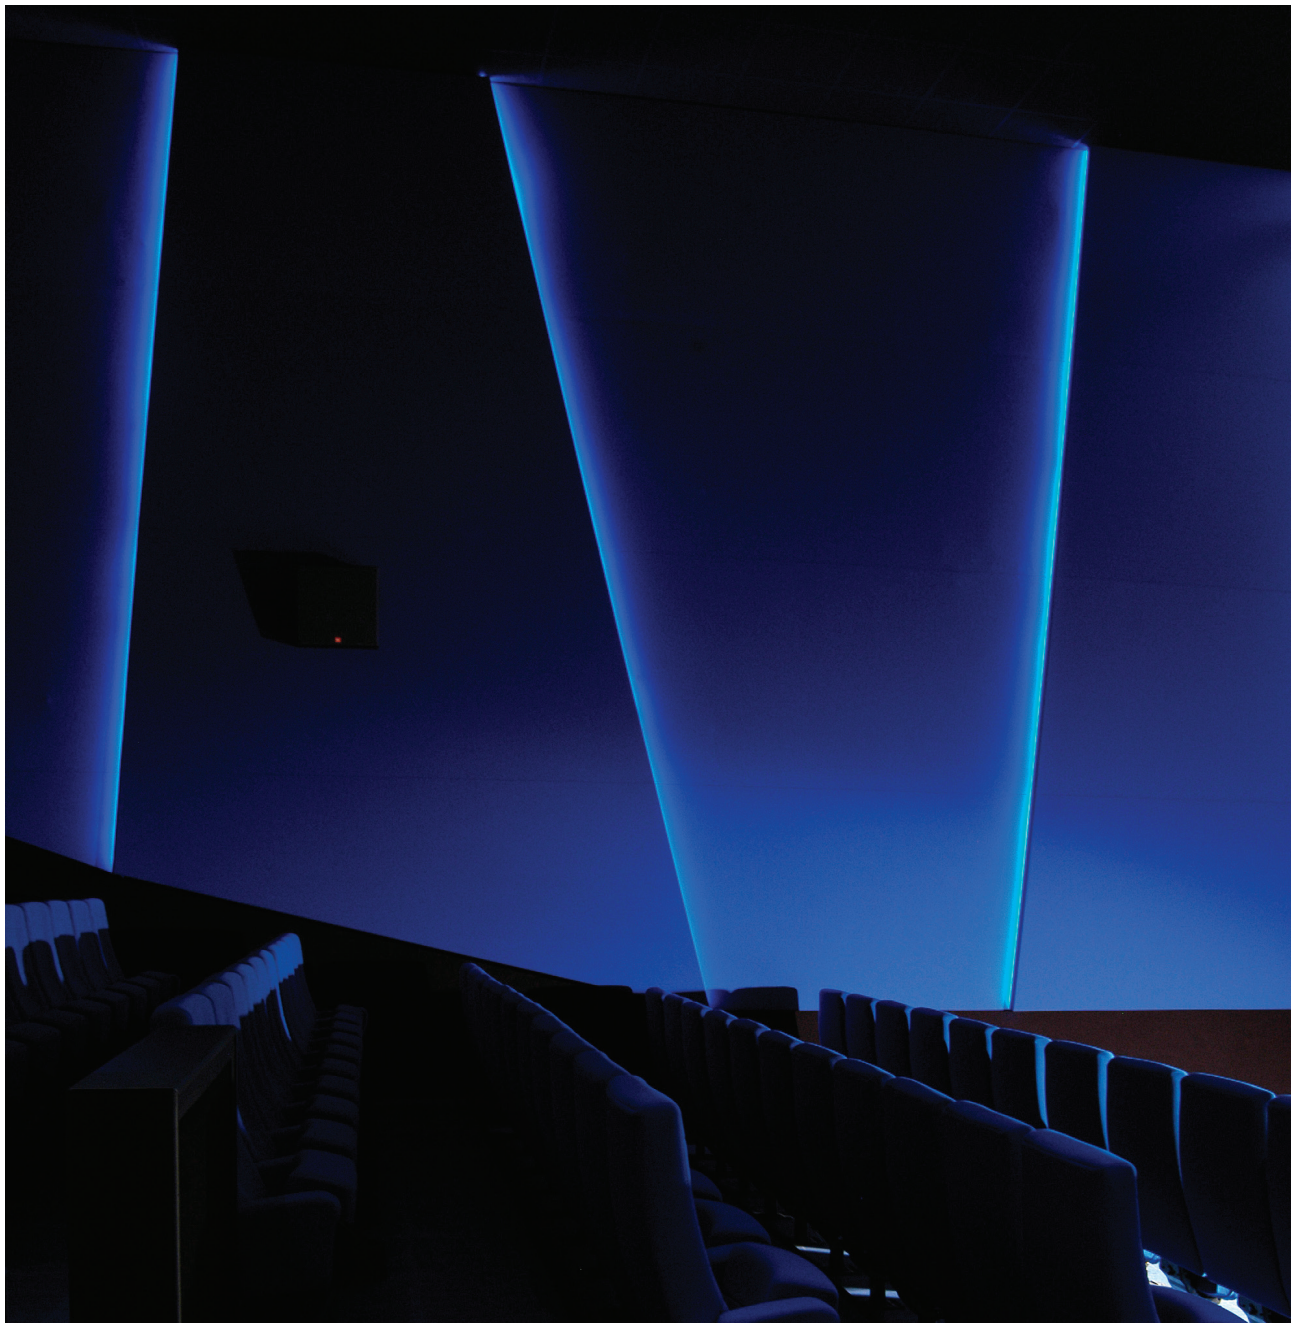

Wall Lighting 24v DC LED System



Description

Gradus LED wall lighting has been designed to provide soft illumination way finding for auditoria access during showings or performances without distracting from the primary function of the installation.





Gradus LED wall light provides 2.2 lux at 1.9m distance when mounted 300mm above floor.

Colorimetric Details

CCT	3075K
CRI (Ra)	90

Specification

Environment	Interior
Description	PVC-u base / PVC-u cover
Details	Incorporates a clear window for light to shine downwards
Length	2.5m
Profile Colour	Black
Accessories	End cap - ECWLB45
Lighting System	Interlok Advance™ 50mm spaced 24v DC
LED Colour	<ul style="list-style-type: none"> ■ Blue ■ Green ■ Amber ■ Red ■ White

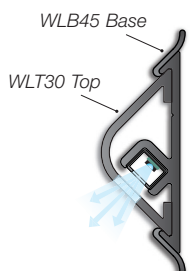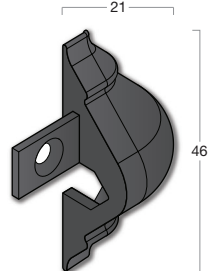PROFILE	TOP	BASE	END CAP
 <p>WLB45 Base WLT30 Top</p> <p>WLT30/WLB45</p>	 <p>Black PVC-u Clear PVC-u</p> <p>31.5 6</p> <p>WLT30 TOP</p>	 <p>45.5 11</p> <p>WLB45 BASE</p>	 <p>21 46</p> <p>ECWLB45</p>

Illustrations not to size. Products subject to minor design alterations without notice.



Seat Lighting / Seat Row Indicator



Description

Gradus seat row indicators are used to identify the location of seating rows, to provide illumination for guidance (e.g. by emergency exits) or to illuminate the floor for safe movement around auditoria when the main lighting is dimmed.


- The profiles are installed into seating at the end of rows and are ideal for use in auditoria
- Circular in design, the profile offers a twin lighting effect - row indication plus down-lighting
- Seat row indicators can incorporate alphabetical or numerical formats
- Can be used without numbers/letters to provide an alternative way of illuminating the steps below
- Low power consumption - 50 mA per unit - cost-effective to operate

PROFILE	VOLTAGE	DESCRIPTION	DETAILS	DIMENSIONS	PROFILE COLOUR	LED COLOUR
	12v DC	Circular aluminium profile that offers a twin lighting effect - row indication plus down-lighting	Alphabetical or numerical format	60mm (diameter) x 20mm (depth)	<input type="checkbox"/> Clear Anodised Aluminium <input checked="" type="checkbox"/> Black Anodised Aluminium <input type="checkbox"/> Gold Anodised Aluminium	<input checked="" type="checkbox"/> Blue <input type="checkbox"/> Green <input type="checkbox"/> Red <input type="checkbox"/> White

For power supply units see page 42. Illustrations not to size. Products subject to minor design alterations without notice.






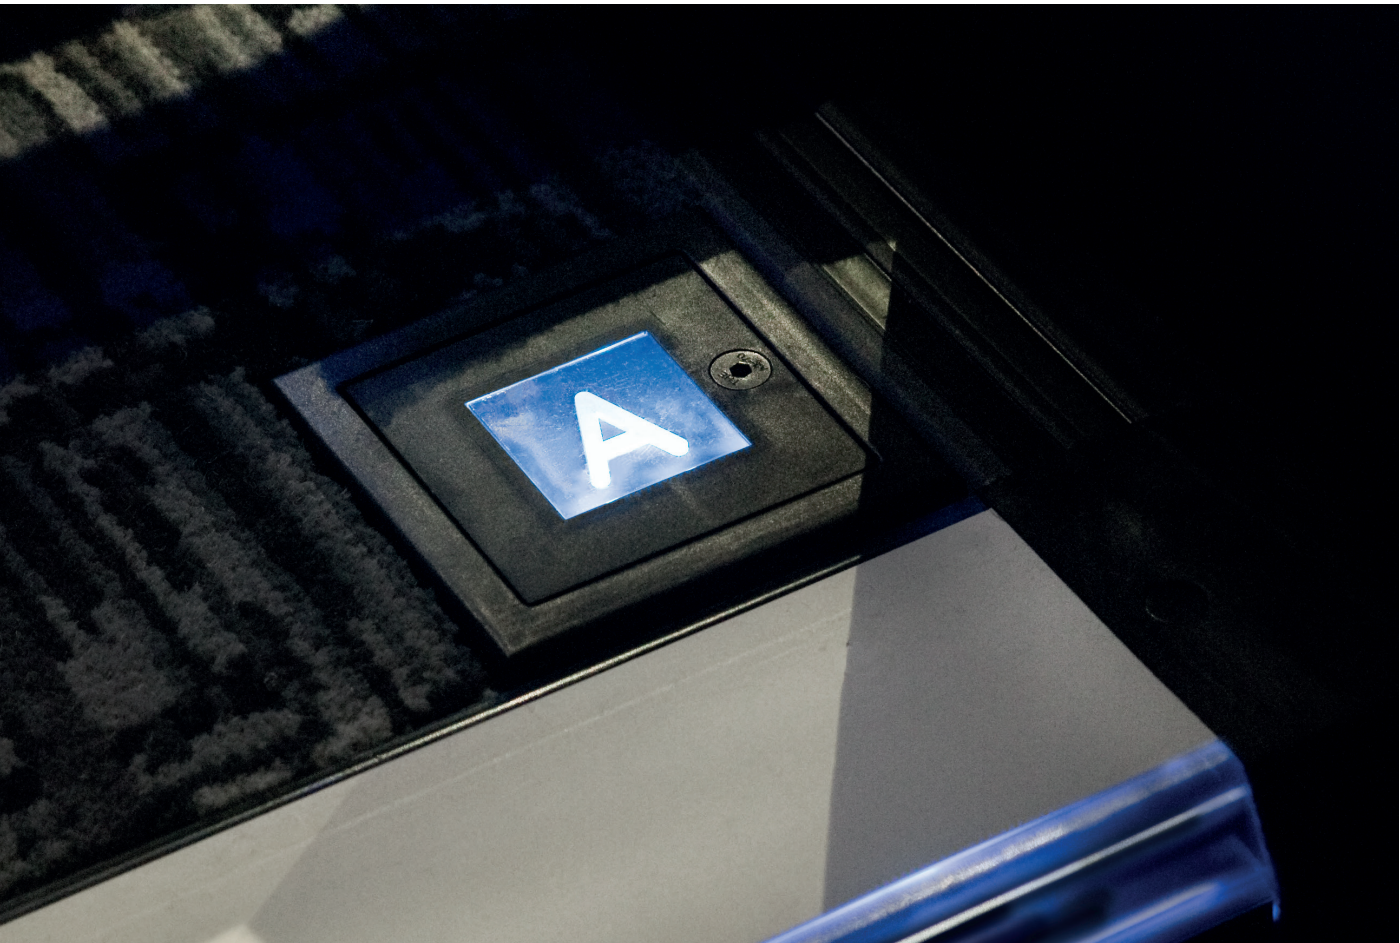




LED Step Row Indicator

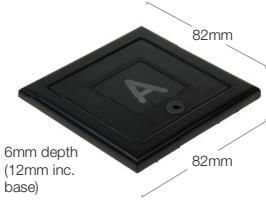





Description

Gradus step row indicators are used to identify seating rows in auditoria, such as cinema, theatres and lecture theatres in darkened conditions.


- The step row indicator is supplied in three parts - base, frame with window and indicator tile
- The step row indicator features a 12mm base suitable for installing with carpets that have a compressed thickness of 12mm. It can be installed into the surrounding floorcoverings on either the step tread or the riser
- The profile can incorporate alphabetical or numerical formats, or can be produced in graphical format for directional signage or to denote particular areas eg. wheelchair access points
- Extra low voltage (12v DC) for safe installation and use
- Low power consumption - 25mA per indicator - so it is cost effective to operate

PROFILE	VOLTAGE	DESCRIPTION	DETAILS	DIMENSIONS	PROFILE COLOUR	LED COLOUR
	12v DC	System supplied in 3 parts: PVC-u frame PVC-u base Tile Gauge: 12mm	Alphabetical, numerical or graphical format	82mm (width) x 82mm (height) x 12mm (depth)	 Black	 Blue  Green  Amber  Red  Warm White  White

Images are not to scale in mm. Products subject to minor design alterations without notice.

LED	BASE	FRAME	TILE
 <p>IAV/3</p>			

For power supply units see page 42.

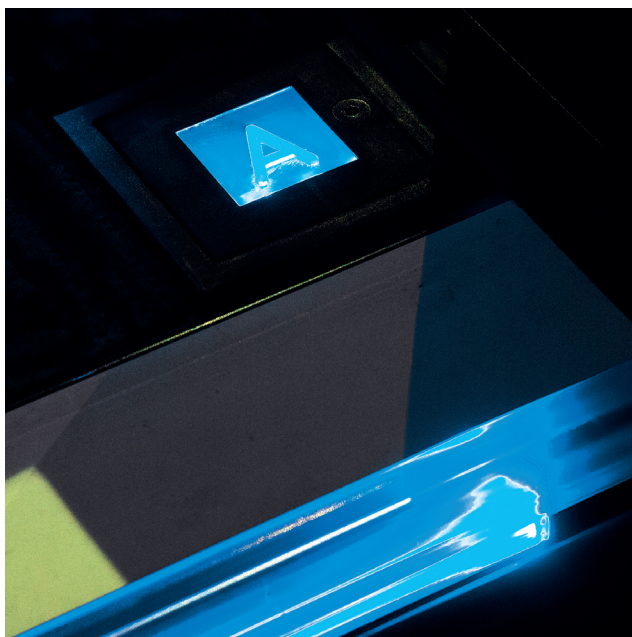


Decortape



Description

Decortape is a flexible LED lighting tape that allows bespoke design lighting in most commercial applications.

- Adhesive taped back means Decortape can be mounted to any surface
- Available with splash proof coating, making this product suitable for use in wet areas
- Flexibility allows designers to create bespoke designs
- Provides a crisp light instantly on start-up

PROFILE	ENVIRONMENT	VOLTAGE	SIZE	ACCESSORIES	LED COLOUR AVAILABILITY
	Interior	12v DC or 24v DC	10mm (width) x 5m (length)	LED Driver	<ul style="list-style-type: none"> ■ Blue ■ Green ■ Red ■ Warm White ■ White

For power supply units see page 42.

Power Supply Units

A range of direct current power supply units to provide a safe and efficient power source to low level lighting systems.

Power Supply Units



Description

Gradus power supply units are designed to transform power from the mains to a 12v/24v DC system, thereby providing a safe and efficient power source to a low level lighting system.

- Interlok Advance and Continuity LEDs operate on extra low voltages and, therefore, when used correctly, do not represent a safety hazard
- Always ensure that Gradus systems are connected to a Gradus power source or other approved unit. They must never under any circumstance be connected directly to the mains supply



Visit www.gradusworld.com for power supply diagram.

PSU Loadings


Code	Input Voltage	Output Voltage	Current	IAV Strips 0.15A / metre	Continuity LED 0.025A / unit	Aisle Loom 0.075A / metre	Row Indicator 0.025A / metre	Seat Light 0.05A / metre	Decorflex 0.33A / metre
PSU30/12v	200-240v AC	12v DC	2.5A	9.6m / 16 units	100 units	33m	100 units	50 units	n/a
PSU30/24v	200-240v AC	24v DC	1.25A	n/a	n/a	n/a	n/a	n/a	3.5m
PSU75/12v	200-240v AC	12v DC	6.25A	24m / 40 units	250 units	80M	250 units	175 units	n/a
PSU75/24v	200-240v AC	24v DC	3.125A	n/a	n/a	n/a	n/a	n/a	9m
PSU150/12v	90-295v AC	12v DC	12.5A	48m / 80 units	500 units	160m	500 units	250 units	n/a
PSU150/24v	90-295v AC	24v DC	6.25A	n/a	n/a	n/a	n/a	n/a	18m
PSU240/12v	90-264v AC	12v DC	20A	78m / 130 units	800 units	260m	800 units	400 units	n/a
PSU240/24v	90-264v AC	24v DC	10A	n/a	n/a	n/a	n/a	n/a	30m
PSU320/12v	90-305v AC	12v DC	26.6A	105m / 175 units	1060 units	350m	1060 units	530 units	n/a
PSU320/24v	90-305v AC	24v DC	13.3A	n/a	n/a	n/a	n/a	n/a	40m
PSU/DIMMER	12v / 24v DC	12v / 24v DC	10A	Use with loadings of 10A or below, in conjunction with a 1-10v dimming controller and PSU					
DAL/DIMMER	12v / 24v DC	12v / 24v DC	10A	Use with loadings of 10A or below, in conjunction with a DALI dimming system and PSU					

Where there is a mixed load the total current must be found and the correct power supply used, e.g; 20M of IAV strips, 50M of aisle loom and 60 row indicators = (34 * 0.15 for 20M of IAV strips you would need 34 units) + (50 * 0.075 for the aisle loom) + (60 * 0.025 for the row indicators) = 5.1 + 3.75 + 1.5 = 10.35A, therefore the PSU150/12v would be a suitable power supply. **For LED strips the maximum single continuous run is 10M. For Aisle loom the maximum single continuous run is 10M. For Continuity lighting 10M is the maximum single continuous run.** Dimming LEDs due to volt drop can be compensated for by wiring the circuit in a ring, or splitting the load over 2 circuits.

Technical Services / Specification Guidelines

This section contains details on the Technical Services offered by Gradus and information on the most relevant Building Regulations and British Standards and how they impact upon Gradus LED lighting specification.

Technical Services

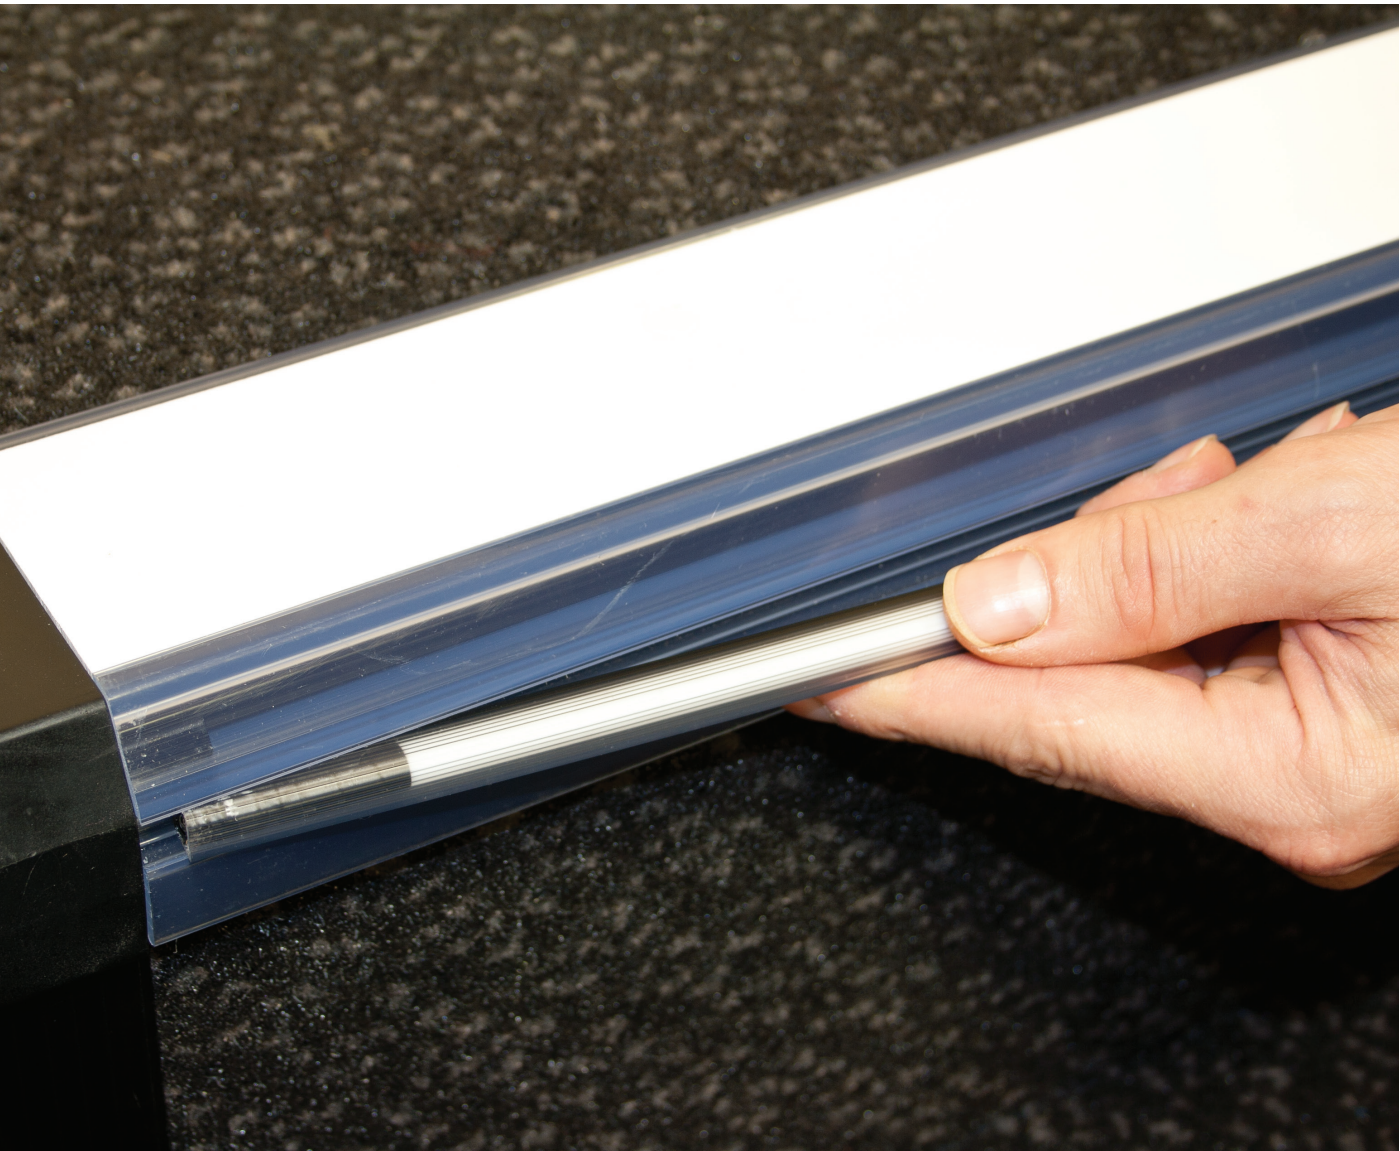

- Gradus offers a complete supply and fit package, ensuring a convenient and reliable service throughout the specification, survey and installation process.
- Specially trained specification consultants can provide face to face advice when specifying lighting, ensuring that the products selected are matched to the specific requirements of the environment.
- A complete estimating service is available on a supply only basis or for both supply and installation. Gradus also have on-line project collaboration capabilities.
- Site surveys are carried out and Gradus liaises with other trades to ensure complete peace of mind for the customer.
- Gradus Contracts manages the entire process to tailor the order to specific customer requirements.
- Trained and experienced technicians carry out the installations in line with Gradus quality system, in accordance with current standards and guidance stated in B8300:2009+A1:2010.
- Electrical installations carried out and tested in accordance with BS7671 wiring regulations.
- To take advantage of the supply and fit service, contact Gradus' specification consultants who will undertake an evaluation of the requirements from which a detailed quote can be prepared. Details of specification consultants are available from Gradus Technical Support on +44 (0) 1625 428922.

Applicable to UK & Eire only.

Specification Guidelines

The Building Regulations and British Standards specifying the right Gradus product

The Building Regulations and British Standards are designed to ensure the optimum specification of products through a combination of legislative requirements and guidance. The following extracts have been taken from The Building Regulations 2010 and British Standard BS 8300:2009+A1:2010 and show how Gradus products can be used to help satisfy these requirements, and help achieve an inclusive environment in line with the Equality Act 2010. For further details on this or any other aspect of The Building Regulations and British Standards contact Gradus Technical Support on 01625 428922.

Extracts shown below represent examples of good practice.

BS 8300:2009+A1:2010

This standard provides guidance or good practice in the design of domestic and non-domestic buildings and their approaches so that they are convenient to use by disabled people. Gradus advice and recommendations are [shown in blue text](#).

Guidance on Stair Edgings

5.9.5 Identification and slip resistance of nosings

Each step nosing should incorporate a permanently contrasting continuous material for the full width of the stair on both the tread and the riser to help blind and partially sighted people appreciate the extent of the stair and identify individual treads ¹. The material should be 50 mm to 65 mm on the tread and 30mm to 55mm on the riser, and should contrast visually with the remainder of the tread and riser ².

NOTE 1 A nosing that wraps around the riser might assist blind or partially sighted people ³.

NOTE 2 A proprietary nosing can provide a durable solution that satisfies both visual contrast and slip resistance criteria (see BRE IP 15/03 [13]) ³.

The whole tread or the nosing should incorporate slip-resistant material, starting as close as practicable to the front edge of the nosing and extending the full width of the tread ³.

NOTE 3 Guidance on slip resistance of surfaces is given in Annex E.

¹ All Gradus stair edging insert colours have been measured to provide Light Reflectance Values (LRVs)* in order to provide the specifier with information to ensure that suitable contrast is achieved with the surrounding stair material.

* These values have been determined using the CIE Y value, in accordance with BS 8493:2008+A1:2010. Details of how LRVs can be used to assess visual contrast and can be found in Annex B of BS 8300:2009+A1:2010.

² The profile dimensions stated are guidance only and other factors should be taken into consideration when specifying stair edgings such as step dimension and type and frequency of traffic.

³ The RXT1218L stair edging profile features a slip-resistant pvc insert that extends around the leading edge of the profile to ensure that foot contact is always made with the slip-resistant element of the stair edging, providing the ideal solution for reducing the risk of slips, trips and falls on stairs in line with BRE.

5.9.8 Artificial lighting on a stepped access route

Each flight and landing of a stepped access route should be well illuminated, providing a clear distinction between each step and riser. The illuminance at tread level should be at least 100 lux.

Lighting that will cause glare (such as poorly located wall lights, spotlights, floodlights or low-level light sources) should be avoided.

Gradus provides a range of step and aisle lighting systems that in dark conditions, where light levels are below 100 lux on the step, will illuminate the edge of the step and provide a means of identifying the changes in level.

8 Vertical circulation

8.1 Internal steps and stairs

8.1.5 Surface finishes

The surface materials used for internal steps and stairs should be chosen to be easy to maintain and as slip-resistant as possible, especially if surfaces are likely to become wet due to location or use, or if spillage occurs.

NOTE Advice and further references on slip resistance of surfaces is given in Annex E.

A choice of slip-resistant insert materials is available for all Gradus illuminated stair edgings. Xtra-grip and Xtra-grip Plus inserts have been specifically designed to reduce the risk of slip in internal wet areas or where spillages are likely to occur.

Annex E Slip potential characteristics of treads, ramp surfaces and floor finishes

E.2 Slip resistance

The following indices are used to indicate the slipperiness of surfaces:

- a) pendulum test values (PTVs) obtained using a pendulum tester in line with BS 7976-2;
- b) surface micro-roughness (Rz) measurements using a stylus instrument in accordance with BS 1134-1.

E.5 Step nosings

Where slip resistance is required for nosings and treads, the slip resistance needs to be the equivalent to that expected for level surfaces. A PTV greater than 36 is considered to be suitable, as pushing and turning are unlikely on stairs. On existing nosings, the slip resistance of step nosings are generally expressed by their Rz roughness value as PTV is difficult to measure. In such cases a roughness Rz value of 20 µm is recommended.

All Gradus stair edging inserts are independently tested for slip-resistance by the Health & Safety Laboratory using the pendulum test – all inserts have a low slip potential (inserts measured in dry conditions - PTV of between 68 and 70; inserts measured in wet conditions – PTV of 64). All inserts are also tested for wear, surface roughness, chemical resistance and bacterial/fungal resistance.

Permission to reproduce extracts from BS 8300:2009+A1:2010 is granted by BSI. British Standards can be obtained in PDF or hard copy formats from the BSI online shop: www.bsigroup.com/Shop or by contacting BSI Customer Services for hardcopies only: Tel: +44 (0)20 8996 9001, Email: cservices@bsigroup.com.

The Building Regulations 2010 - Approved Document M

Approved documents are intended to provide guidance and much of the guidance in Approved Document M is based on BS8300:2009+A1:2010. The main points relating to stair and stepped access in Approved Document M are shown below, with supporting recommendations by Gradus [shown in blue text](#).

Stepped Access

- 1.27 People with impaired sight risk tripping or losing their balance if there is no warning that steps provide a change in level. [Use of a stair edging with LED lighting will make the steps highly visible when the ambient light levels are reduced.](#)
- 1.29 Materials for treads should not present a slip hazard when the surface is wet. [Gradus illuminated stair edgings are available with a range of slip-resistant inserts for interior use, both in dry conditions and where there is a risk of the steps becoming wet.](#)
- 1.30 People should easily be able to appreciate where to place their feet by highlighting nosings and avoiding open risers. [Use of a stair edging that contrasts with the surrounding tread/riser materials will help to clearly define the step edge in lit conditions. LED lighting will highlight the edge of the step when the general lighting is dimmed or off.](#)
[If light levels in an area are low, people entering the area from a well lit area will find it very difficult to see steps that are not fitted with step lighting.](#)
[Stair edging inserts should vary by 30 points in Light Reflectance Value \(LRV\) from the tread and riser materials, but less light will be reflected in low ambient light conditions, therefore the use of illuminated stair edgings will ensure the step remains visible when overhead lighting is dimmed or off.](#)

Source: Building Regulations - Access to and use of buildings - Approved Document M - 2004 Edition
Crown Copyright material is reproduced with the permission of the Controller of HMSO and the Queen's Printer for Scotland.

The colour, light and contrast manual

Keith Bright and Geoffrey Cook

Powered way-guidance systems include electroluminescent strips and tracks formed using miniature incandescent light-sources or LED's. Studies of powered way-guidance systems have shown that although they do not provide high illuminance in themselves, the contrast they provide with the surrounding area, and the fact they tend to delineate a route to be taken rather than a general area, mean they are generally preferred by all users, including those with poor vision. They also enhance the speed at which people escape from a space (Wright et al., 2001a).

There is also evidence to suggest that low-mounted way-guidance systems are often more effective than overhead emergency lighting in situations where smoke encroaches into the escape route (Cook et al., 1999b).



Product Index

Illuminated Stair Edgings	11	Floor Trim Lighting Systems	27
AS1106L	22	CL05/LB10	29
AT718L	21	CLC13/TDB45	29
ATD121L	21	CLC16/TDB45	29
ATD71L	20	CLC20/TDB45	30
ATF71L	20	CLS13/LBS45	29
ATNG71L	22	CLS16/LBS45	29
Continuity 12v DC LED Lighting System	12	CLS20/LBS45	30
ELAF230	23	DLA45	30
ELAF5150	23	Lighting Systems	33
How to select the correct insert	25	Continuity LED Linear Lighting System	32-33
Insert Colour Availability	24	Decortape	40
Interlok Advance LED System	13	LED Step Row Indicator	38-39
RNT1218L	19	Wall Lighting 24v DC LED System	34-35
RNT718L	19	Seat Lighting / Seat Row Indicator	36-37
RXT1218L	18	Power Supply Units	41-42
Step Lighting Effects	14-15	Technical Services / Specification Guidelines	43
		Specification Guidelines	45-46
		Technical Services	44

**Other products
in the
Gradus range**

www.gradusworld.com

call: 01625 428922



Wall Protection




Stair Edgings



Barrier Matting



Carpets

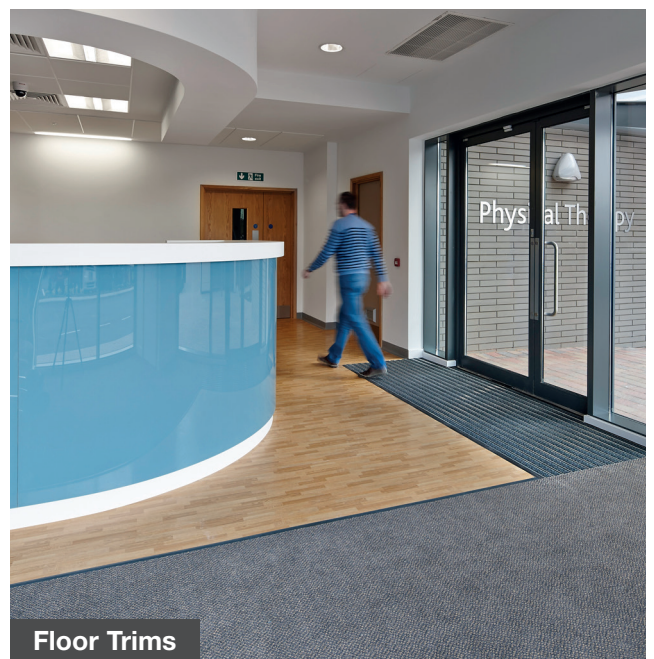

Floor Trims



www.gradusworld.com
call: 01625 428922

GRADUS

Gradus Accessories Park Green Macclesfield Cheshire SK11 7LZ England UK Tel: 01625 428922 Fax: 01625 433949
For enquiries outside the UK and Eire contact Gradus International on +44 (0)1625 613780

Gradus International
England
Tel +44 (0) 1625 613780

Gradus Far East
Singapore
Tel: (+65) 6734 5933

Gradus Middle East
United Arab Emirates
Tel: (+971) 4887 6540

Gradus France
France
Tél: (+33) 1 8114 9300

 **gradus_world**

This catalogue supersedes and replaces all previous issues.

All designs, images and illustrations contained within this catalogue remain the copyright of Gradus Ltd.©
All trademarks, product names and codes detailed within this catalogue are the property of Gradus Ltd.